





The i1 model operates in forward & backward directions with memory functions to return roll to defect position. The machine operates at 300 meters / min and is designed for shrink sleeve inspection process without in-line continuous perforations.

A strobe synchronized by photo sensor is a standard accessory. Flexible packaging and adhesive label materials may be inspected with lay-on roller option.


Machine Specifications

Description	Spec
Speed	40 m/min
Maximum cuts per Minutes	400
Maximum Draw	900 mm
Widths	300/400/500/600 mm
Unwind Diameter	700 mm



To lower cost and inspection production time, all print defects must be doctored prior to seaming.



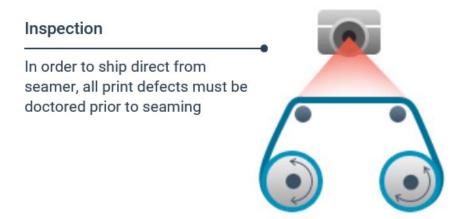

Layout

